
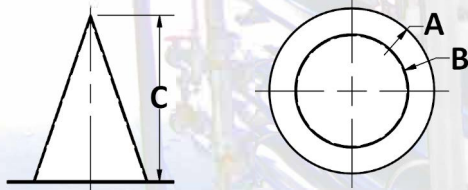


CONICAL TEMPORARY STRAINERS


Conical temporary strainers provide a cost effective solution for protecting downstream equipment from sediment and debris during pipeline start-ups and commissioning. Available in a wide variety of sizes, materials and configurations to meet your specific needs. Designed for easy installation between piping flanges.

Key Features:

- Construction in SS304, SS316 and Monel.
- Available in ANSI classes 150, 300, 600 and 900.
- Perforations ranging from 1/32" to 1/2".
- Mesh liners ranging from 20 to 100 mesh.
- Special Alloy construction available upon request.
- RTJ style connections available upon request.

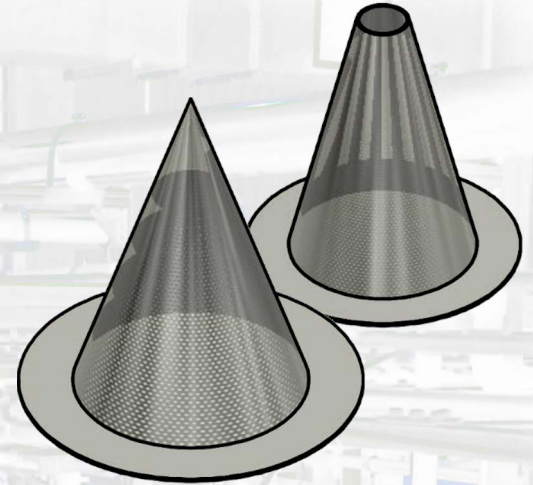

CONE TYPE STRAINER DIMENSIONS - CLASS 150

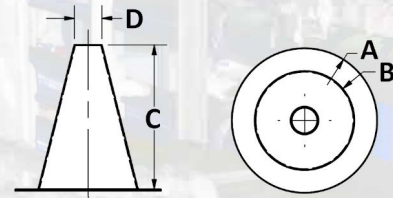

BASKET TYPE STRAINER DIMENSIONS - CLASS 150

Pipe Line Size	A	B	C
2	3.88	1.75	6.00
2.5	4.63	2.25	7.00
3	5.13	2.75	9.00
4	6.63	3.50	12.00
5	7.50	4.63	14.00
6	8.50	5.50	17.00
8	10.75	7.13	23.00
10	12.13	9.00	27.00
12	15.88	10.88	32.00
14	17.50	12.63	33.00
16	20.00	14.50	39.00
18	21.38	16.38	44.00
20	23.63	18.38	49.00
24	28.00	20.38	58.00

Pipe Line Size	A	B	C	D
2	3.88	1.75	6.00	1.00
2.5	4.63	2.25	7.00	1.00
3	5.13	2.75	9.00	1.00
4	6.63	3.50	12.00	2.00
5	7.50	4.63	14.00	2.00
6	8.50	5.50	17.00	2.00
8	10.75	7.13	23.00	2.00
10	12.13	9.00	27.00	3.00
12	15.88	10.88	32.00	3.00
14	17.50	12.63	33.00	4.00
16	20.00	14.50	39.00	4.00
18	21.38	16.38	44.00	6.00
20	23.63	18.38	49.00	6.00
24	28.00	20.38	58.00	10.00

Dimensions for calss 300, 600 and 900 available upon request.

Contact us for more information.